Rittal – The System.

Faster – better – everywhere.

Modular Enclosure Buyer's Guide



Understanding Modular Enclosures.



Modular freestanding enclosures offer a number of key advantages over traditional unibody enclosures.

While modular enclosures are the predominant enclosure worldwide, the adoption rate in North America has been slower. For many prospective buyers and specifiers, the primary reason is a lack of understanding about the differences and benefits.





Despite a number of functional and financial advantages offered by modular enclosures, purchasing decisions are being driven by the shortsighted focus on acquisition cost, and in some cases, the mistaken notion that modular enclosures are inherently more expensive. When specifications for control panels and other applications are written, the true costs and benefits of utilizing one enclosure solution over another must be fully considered especially in today's economic climate, where every penny counts.

Although acquisition costs for unibody enclosures might be lower, once the use and operating costs are factored into the equation, a unibody solution may prove to be cost-prohibitive. Because the lifecycle of a typical industrial enclosure is filled with planned and unplanned modifications and repairs, using a modular platform can limit exposure to risks associated with additional costs and downtime—often making a modular enclosure the most cost- effective choice.



Modular enclosures provide the protection required for industrial drives, controls and other equipment, along with the practical flexibility to evolve with the changing demands of modern business—all while saving time and money over the course of their lifecycles.

This Buyer's Guide will show you how.



 \gg

What Are Modular Enclosures?

ENCLOSURES

CO (TYCE)


 \gg

Modular freestanding enclosures offer a number of key advantages over traditional unibody enclosures. The physical differences between modular and unibody enclosures provide the first discernible advantages. The most basic differences are described below.



Gasket

Most basic unibody enclosures use a peel-and-stick strip gasket for the door seal. Most modular enclosures feature a foamed-in-place gasket that is poured continuously around the perimeter of the enclosure skin (door, sidewall, etc.) to ensure no gaps exist. This provides a better seal and memory retention, which increases atmospheric and corrosive protection.



Paint

Any plain carbon steel enclosure will be required to be painted for corrosion protection. The paint of choice is generally powder paint, known for its hard, durable finish. Modular enclosures use a threestep painting process similar to the process used in the automotive industry. In a closed frame modular enclosure, the addition of an electrophoretic dip-coat primer adds a level of protection, and finally, the two-part primer and powder coat combination ensures maximum corrosion resistance and durability.



Mounting Panel

The most commonly modified part on any enclosure, the mounting panel, differs in both construction and ease of use. Unibody panels are generally painted steel and constructed with an L-fold around the perimeter to stiffen them. Modular panels are generally zinc-plated steel, allowing for an easier, more accessible ground that does not require the scraping of paint. They may also feature a C-fold for easier handling and greater strength. The modular enclosure design allows for the addition of rails, making it possible to slide the panel into and out of the front, side, or rear enclosure openings. This saves time and increases safety when compared with the unibody technique of laying the enclosure on its back and lifting the panel with a crane or forklift.



External Skins

Modular enclosure skins offer many benefits over their unibody counterparts. The ability to remove the door, sidewalls, and other parts easily allows for greater accessibility and more accurate cutouts and modifications. The inside door surface has a stiffener with multiple holes, which is capable of supporting a wide variety of chassis rails or panels, yielding an entire separate mounting surface to be utilized. Standard off-the-shelf unibody enclosures only allow the attachment of a print pocket.



Frame

In addition to the ability to join enclosures and easily add accessories, the modular enclosure frame can accommodate more door options. Custom motor control center (MCC) solutions can be configured with several smaller partial doors making up the face of the cabinet. Then both horizontal and vertical dividers can be added to the frame, easily separating these compartments—e.g., high/low voltage sections.





ENCLOSURES

 \gg

Common Modular Enclosure Misperceptions

Modular enclosures have gained acceptance in almost every industrial market; however, misperceptions continue to exist. The most common are:

Modular enclosures are not as strong as unibody enclosures.

False. This misperception stems from the fact that modular enclosure walls are thinner than a unibody enclosure. However, the strength of a modular enclosure comes from its frame, not the enclosure walls. The equipment load being exerted on the enclosure is transferred to the vertical frame members.

Many part numbers must be ordered to complete a modular enclosure assembly.

False. A basic modular enclosure consists of two part numbers – the core frame/assembly (with included mounting panel) and a pair of sidewalls. Coincidentally, the equivalent unibody enclosure will also require two part numbers – the core enclosure plus a mounting panel.

Modular enclosures require a lot of assembly work, like an erector set.

False. Assembly work, while required, is minimal for a basic system. The more complex the configuration, the more assembly required. However, the system accessories can be added by someone without specialized training, unlike the more difficult fabrication techniques (cutting/welding/bending) needed to modify a unibody enclosure.

Modular systems are more expensive.

False. Standard pricing on core systems are comparable to unibody enclosures. Additionally, there are many hidden costs that become evident over the total lifecycle of a unibody enclosure.



SHIPPING


Rittal Xpress stock, modification and paint program expedites standard and modified enclosure delivery

E-coat, powder-coat and nano-coat multi-step process delivers longlasting corrosion resistance

Nelded symmetrical frame increases baying options and load weight

The Journey of an Enclosure

From Start to Finish, the Rittal TS 8 Modular Enclosure Is Engineered Better.

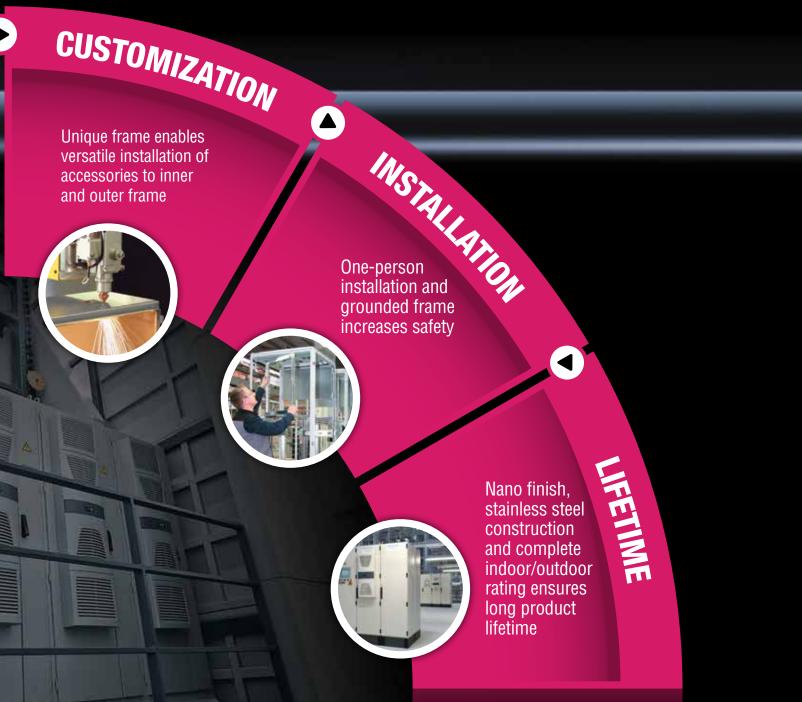

TS 8 Modular Enclosures from Rittal:

for Tough Environments.

How tough is the TS 8 Enclosure from Rittal?

Tough enough to support 1500 pounds about the weight of a young Sumatran rhinoceros. And tough enough to withstand the harshest industrial environments, like...

> An oil rig 40 miles off the Gulf Coast

A subway tunnel 50 feet underground

> A substation in the Southwestern desert



10

Why So Tough?

Not all enclosures are created equal. Rittal protects controls and systems for the world's leading companies. Rittal is built tough to keep operations running around the globe, in every environment. See how Rittal is engineered better and choose TS 8 to make a change for the better.



Steel folded 16x and closed welded for stronger frame construction and fewer points of failure



Carbon steel base and enclosure frame, zinc-plated carbon steel mounting panel



Durable, rugged corrosionresistant finish from our 3-step, automotive-like coating process



30% higher stability—but with 15% less frame weight



Proven, preferred modular construction handles more equipment



Available for indoor and outdoor solutions



TS 8 Leads the Competition

The TS 8 modular enclosure system provides unsurpassed flexibility, scalability, strength, and durability compared to competitive products. Whether housing drives, flow monitoring systems or critical electrical components, the complete line of TS 8 products maintains a clean, consistent environment in the most extreme conditions. Compared to similar products, TS 8 features and benefits include:

- 30 percent more available mounting space than traditional unibody enclosures
- Four-point latching system and a continuous foamed-in-place gasket create a water- and dust-proof seal
- All exposed hardware (handle, hinges, latches, eye-bolts, etc.) is made of 316 stainless steel
- Fold-away handle does not take up valuable door space and provides a simple way to exchange lock inserts or add padlock provisions
- A large assortment of internal accessories that allow for threedimensional mounting on all internal surfaces
- Internally removable floor panel that simplifies conduit and wiring installation mounting panel
- Quick-release hinges that enable fast and easy door removal and replacement
- Strength of modular construction delivers a load capacity of 3,150 pounds to handle more equipment within the enclosure
- CSA, UL, cUL and seven additional global standard approvals make them ideal for markets like shipping, oil and gas, and automotive

True Cost

Most people are familiar with the concept of Return On Investment (ROI). Considering the savings or possible yields of a decision beyond the initial cost is a wise course of action in any business. True cost is calculated by simply totaling the costs of an enclosure solution over the course of its lifecycle, and is represented by this short equation:

Acquisition Costs + Use Costs + Operating Costs = True Cost

Acquisition costs are realities for control panel shops, integrators, OEMs, and end users alike as these costs are passed down from one group to the next. However, when taking the actual design and procurement processes into account, the primary benefactor of reduced acquisition costs will be the system designer.

However, after the initial purchase decision is made, panel shops and integrators are more likely to be concerned with use costs, which are attributed to labor and the use of floor space during modification and integration. End users are more concerned with operating costs, which are affected by the cost of maintenance labor, reduction of productivity during downtime and costs incurred during expansion. The inherent advantages of modular enclosures can substantially reduce all of these costs.

TS 8 Modular Enclosures

Invented here. Perfected here. Poorly copied over there.

With more than 12 million units sold around the world, Rittal is the undisputed leader in modular enclosures. We're glad that the benefits of modular enclosures have pushed the competition to offer their own modular products at last. What took them so long?

		VS.	
Rittal	Advantage	Design Features	Hoffman
Side-to-back; side-to-side; top-to-bottom and back-to-back	Greater design possibilities to meet customer needs	Baying	Side-to-side and front-to-rear baying options only
Steel folded 16x and closed welded	Stronger frame construction and fewer points of failure	Frame	Steel folded 6x and closed welded
Completely symmetrical vertical and horizontal sections	Identical accessories for width and depth limits inventory and parts needed on site	Frame Symmetry	Non-symmetrical vertical and horizontal sections
Four-point latches	Four-point latches generate a tighter and stronger seal	Latch System	Three-point latches
Mounting on inner and outer frame level	15% more mounting surface for accessories	Mounting	Mounting on inner frame only
Plastic slide blocks with metal pin; retrofit installation of earthing	Mounting plate is easier to install due to fewer screws and the lock-in aid	Mounting Plate	Slide blocks are not self-aligning with the frame of the enclosure
One-person changeover on any side	Swapping door hinges to opposite side is much less time-consuming	Door Installation	Doors installed on sides of enclosure require the purchase and installation of an additional adapter kit
External panels grounded to frame	Assured grounding minimizes risks and reduces EM/RF interference	Grounding	Straps must be purchased and installed separately
Nanoceramic pre-treatment, electrophoretic dipcoat priming, powder coating	Multi-step automotive-like process increases long-lasting corrosion resistance	Surface Finish	Textured powder inside and out
16-gauge steel frame	Lighter, easier to maneuver and requires only one person to move	Material Thickness	12-gauge steel frame
2 screws on top for installation	One-person installation improves efficiency and less hardware decreases potential for errors	Panel Installation	Slide blocks require 12 pieces of hardware to attach mounting plate to the enclosure. No installation safety provision provided
CSA, UL, cUL; 7 additional global standard approvals	Greater operational footprint in vertical markets like shipping, oil and gas, and automotive	Approvals	CSA, UL, cUL

TS 8 Comparison Chart @ Rittal Corporation 2016. Rittal and TS 8 are the trademarks of Rittal Corporation. All additional depicted trademarks are owned by the respective identified Company(ies). All non-Rittal information and data was obtained from publicly available sources, including competitor websites, consumer product catalogs and industry trade publications. Rittal Corporation does not warranty the accuracy of any non-Rittal information or data depicted herein, and is not responsible for the inclusion of any data inaccurately published by another party. For inquiries contact rittal@rittal.com.

SOFTWARE & SERVICES



13



TS 8 Meets Every Challenge

Our full line of modular enclosures is perfect for every environment and every task.



Carbon Steel Freestanding (Type 12)

- High load-bearing capacity of more than 3000 lbs.
- Inner and outer mounting on the frame level for effective space utilization
- Integral enclosure protection channel prevents the ingress of dirt and water when the door is opened
- Optimum sealing achieved with four-point lock system
- Full flexibility with the use of accessories, thanks to a fully symmetrical frame section, with identical accessories for the width and depth

Carbon Steel Freestanding Disconnect (Type 12)

- Expandable and modular enclosure compatible with all standard TS 8 accessories
- Rigid flange door to accept a variety of high and low amperage operator handles
- Enhanced and greatly simplified hardware installation



Carbon Steel Floormount (Type 12)

- Modular design flexibility
- 12" removable floor stand kits installed
- Overlapping doors for complete access to full-size mounting panel and interior
- Four-point latching for impervious NEMA-12 seal

Carbon Steel Floormount Disconnect (Type 12)

- The flexibility of Rittal's revolutionary modular design
- Rigid flange door to adapt to high or low amperage operator handles
- Four-point latching for impervious NEMA-12 seal





Stainless Steel Freestanding 316-L (Type 4X)

- 30 percent more available mounting space than traditional unibody enclosures of equal dimensions
- Four-point latching system and continuous foamedin-place gasket provide a water- and dust-proof environmental seal
- Padlockable handle that provides both easy access and security
- Full functionality and expandability of the TS enclosure series
- Quick-release hinges that enable fast and easy door removal and replacement




Padlockable Handle Provides both easy access and security.



Four-Point Latching System and Continuous Foamed-In-Place Gasket

Provides a water- and dustproof environmental seal.



Base/Plinth Trim Panels

Fewer parts, more opportunities, lower purchasing, storage and assembly costs – this is the formula behind the base/ plinth system.



Floor Stand Kit Permits easy access to the bottom of the enclosure and is purchased separately.



Rittal – The System.

Faster – better – everywhere.

Rittal Corporation Woodfield Corporate Center 425 North Martingale Road, Suite 400 • Schaumburg, Illinois 60173 • USA Phone: 937-399-0500 • Toll-free: 800-477-4000 Email: rittal@rittal.us • Online: www.rittal.us

Rittal Systems Ltd.

6485 Ordan Drive • Mississauga, Ontario L5T 1X2 • Canada Phone: 905-795-0777 • Toll-free: 800-399-0748 E-Mail: marketing@rittal.ca • Online: www.rittal.ca

Rittal Mexico

Dr. Roberto Gayol 1219–1B • Col. Del Valle Sur, 03100 • Mexico, D.F. Phone: (+52) (55) 5559-5369 • Toll-free: 01 800 8 Rittal (748.825) E-Mail: info@rittal.com.mx • Website: www.rittal.com.mx



CLIMATE CONTROL 💙 IT INFRASTRUCTURE SOFTWARE & SERVICES



FRIEDHELM LOH GROUP