



## MIX-IN-TOTE SYSTEMS



# MIX-IN-TOTE SYSTEMS

## CHOOSE YOUR TOTE

### P-SERIES

- UN31HA1 Certification to SG of 1.9
- Heavy duty welded steel frame stackable to 4 high fully loaded
- 2" valve with quick connect standard
- 7" threaded cap standard
- Optional cap, gaskets, valve materials available



MODEL	Dimensions			Volume
	W	L	H	USG
P900SS	40	48	54.25	240
P1200SS	40	48	64.25	312
P1350SS	40	48	70.25	360
P1500SS	48	48	68.25	418



### FOOD GRADE BULK TRANSPORTER (NON-REGULATED LIQUIDS)

- 304SS construction
- Easily stackable
- Easy to clean 22" cover
- Sanitary piping and discharge valve
- Optional top port for wash nozzle attachment

MODEL	Dimensions			Volume
	W	L	H	USG
BTS 1350	48	48	48	356
BTS 1660	48	48	60	438
BTS 1970	48	48	72	520
BTS 2300	48	48	84	610
BTS 2600	48	48	86	697

### 304SS TOTE

- 3/16" 304SS top & base plate, 10 gauge 304SS shell
- Cross hatched bottom for 100% drainage
- Front & rear anti-tip base assembly accepting Forklift and Pallet jack
- 304SS 16" plain lid, Buna gasket, bolted ring
- 3" fusible cap to meet NFPA-30 requirements
- 2" pressure/vacuum vent
- 2" full port brass ball valve, alum. Cam lock and dust cap (standard)
- Optional lids, gaskets, valve materials available



MODEL	Dimensions			Volume
	W	L	H	USG
S1090	48	48	30	287
S1307	48	48	36	345
S1520	48	48	42	400
S1730	48	48	48	457
S1950	48	48	54	515
S2170	48	48	60	573
S2380	48	48	66	630
S2600	48	48	72	687



## CHOOSE YOUR MIXER

### THRIFTY

- 316SS wet-ends
- Folding-blade impellers are available for installation through 2" NPT bungs
- Shaft coupling enclosed within protective housing
- Available in single-phase or three-phase, 115/230/460/575 volts, air motor options




### GEAR DRIVE HEAVY DUTY

- Precision helical gearing hardened and ground (AGMA 10)
- Outboard shaft bearing minimizes whip and vibration
- Patented quick lock mounting system
- Viton vapor seal
- Alloy mixer housings are powder coated for maximum durability

### F-SERIES

- SS316L investment cast housings, gearbox and clamp
- Heavy-duty lip seal below bearing and coupling
- USDA approved SS construction
- SS motors, wash-down duty in either single-phase or three-phase power

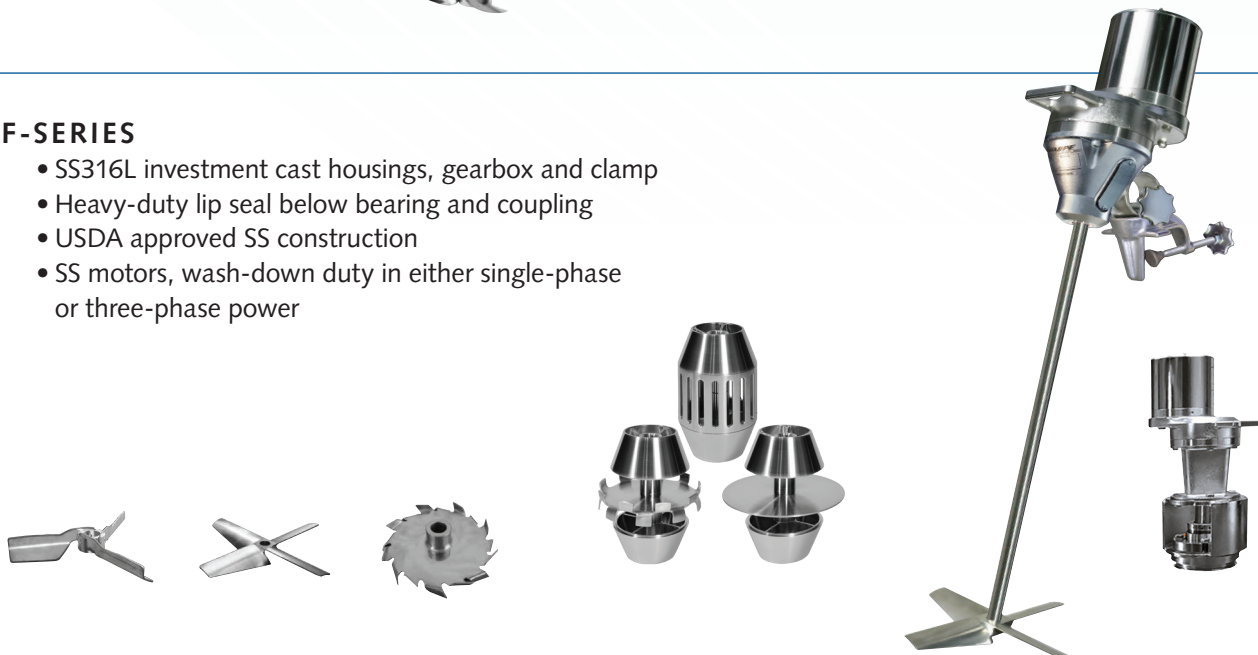






Hayward Gordon is a world class manufacturer of pumps, mixers, engineered systems and process equipment. Our sales and engineering professionals work with each customer as a partner, providing a resource of innovative and cost effective solutions for process specific requirements. The Hayward Gordon Group includes high shear equipment manufacturer Scott Turbon Mixers and mixer manufacturer Sharpe Mixer. With manufacturing facilities in Toronto, Seattle and Adelanto we are well suited to meet your process needs.

Electric, pneumatic and hydraulic lift stands available

#### Composite Totes P-Series IBC's

Viscosity (Centipoise)	P900 240 USG	P1200 312 USG	P1500 360 USG	P1350 418 USG
1 (water)	D-050 4.5" imp	D-075 5" imp	D-200 5/5" imp	G-033 9/9" imp
250	G-050 12" imp	G-050 12" imp	G-050 12" imp	G-050 12" imp
500	G-050 12" imp	G-075 12" imp	G-075 12" imp	G-075 12" imp
1,000 (yogurt/glycerin)	G-100 12" imp	G-100 12" imp	G-100 12" imp	G-150 12" imp
2,500	G-150 12/12" imp	G-150 12/12" imp	G-150 12/12" imp	G-200 12/12" imp
5,000	G-200 12/12" imp	G-200 12/12" imp	G-200 12/12" imp	G-300 12/12" imp
10,000 (corn syrup/mustard)	G-300 12/12" imp			

HYF-218 impellers Any impeller over 7" is foldable

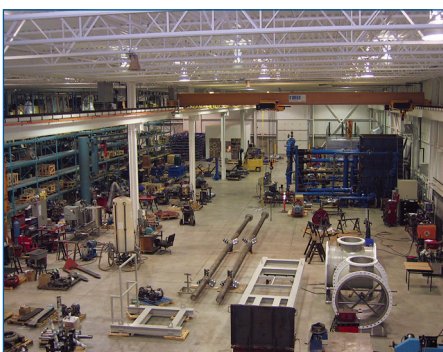

Serving Mining, Oil & Gas,  
Water & Wastewater Treatment



Serving Chemical and Industrial



Serving Sanitary and Pharmaceutical



#### CANADA

5 Brigden Gate, Halton Hills, ON L7G 0A3  
Tel. (905) 693-8595 Fax (905) 693-1452

haywardgordon.com  
info@haywardgordon.com

07/18 1.5M  
Printed in Canada