

Pressure Measurement

Pressure transmitters

Single-range transmitters for general applications

1

SITRANS P200 for gauge and absolute pressure

Overview



The SITRANS P200 pressure transmitter measures the gauge and absolute pressure of liquids, gases and vapors.

- Ceramic measuring cell
- Gauge and absolute measuring ranges 1 to 60 bar (15 to 1000 psi)
- For general applications

Benefits

- High measuring accuracy
- Rugged stainless steel enclosure
- High overload withstand capability
- For aggressive and non-aggressive media
- For measuring the pressure of liquids, gases and vapors
- Compact design

Application

The SITRANS P200 pressure transmitter for gauge and absolute pressure is used in the following industrial areas:

- Mechanical engineering
- Shipbuilding
- Power engineering
- Chemical industry
- Water supply

Design

Device structure without explosion protection

The pressure transmitter consists of a piezoresistive measuring cell with a diaphragm installed in a stainless steel enclosure. It can be used with a connector per EN 175301-803-A (IP65), a device plug M12 (IP67), a cable (IP67) or a Quikon cable quick screw connection (IP67) connected electrically. The output signal is between 4 and 20 mA or 0 and 10 V.


Device structure with explosion protection

The pressure transmitter consists of a piezoresistive measuring cell with a diaphragm installed in a stainless steel enclosure. It can be used with a connector per EN 175301-803-A (IP65) or a device plug M12 (IP67) connected electrically. The output signal is between 4 and 20 mA.

Function

The pressure transmitter measures the gauge and absolute pressure of liquids and gases as well as the level of liquids.

Mode of operation

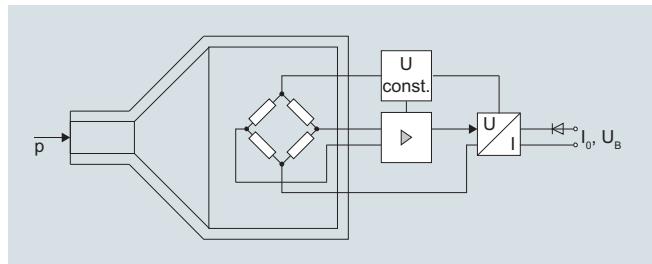

SITRANS P200 pressure transmitters (7MF1565-...), functional diagram

The ceramic measuring cell has a thick-film resistance bridge to which the operating pressure p is transmitted through a ceramic diaphragm.

The voltage output from the measuring cell is converted by an amplifier into an output current of 4 to 20 mA or an output voltage of 0 to 10 V DC.

The output current and voltage are linearly proportional to the input pressure.

Pressure Measurement

Pressure transmitters

Single-range transmitters for general applications

SITRANS P200 for gauge and absolute pressure**Technical specifications**

Application	Liquids, gases and vapors	Electromagnetic compatibility	<ul style="list-style-type: none"> • acc. IEC 61326-1/-2/-3 • acc. NAMUR NE21, only for ATEX versions and with a max. measuring deviation $\leq 1\%$
Mode of operation		Design	
Measuring principle	Piezo-resistive measuring cell (ceramic diaphragm)	Weight	Approx. 0.090 kg (0.198 lb)
Measured variable	Gauge and absolute pressure	Process connections	See dimension drawings
Inputs		Electrical connections	<ul style="list-style-type: none"> • Connector per EN 175301-803-A Form A with cable inlet M16x1.5 or $1/2\text{-}14$ NPT or Pg 11 • Device plug M12 • 2 or 3-wire (0.5 mm^2) cable ($\varnothing \pm 5.4\text{ mm}$) • Quickon cable quick screw connection
Measuring range		Wetted parts materials	
<ul style="list-style-type: none"> • Gauge pressure <ul style="list-style-type: none"> - Metric - US measuring range • Absolute pressure <ul style="list-style-type: none"> - Metric - US measuring range 	<ul style="list-style-type: none"> 1 ... 60 bar (15 ... 870 psi) 15 ... 1000 psi 0.6 ... 16 bar a (10 ... 232 psi abs a) 10 ... 300 psi a 	<ul style="list-style-type: none"> • Measuring cell • Process connection • Gasket 	Al_2O_3 - 96 % Stainless steel, mat. No. 1.4404 (SST 316 L) <ul style="list-style-type: none"> • FPM (Standard) • Neoprene • Perbunan • EPDM
Output		Non-wetted parts materials	
Current signal	4 ... 20 mA	<ul style="list-style-type: none"> • Enclosure • Rack • Cables 	Stainless steel, mat. No. 1.4404 (SST 316 L)
<ul style="list-style-type: none"> • Load • Auxiliary power U_B 	($U_B - 10\text{ V})/0.02\text{ A}$		Plastic
Voltage signal	DC 7 ... 33 V (10 ... 30 V for Ex)		PVC
<ul style="list-style-type: none"> • Load • Auxiliary power U_B • Power consumption 	0 ... 10 V DC		
Ratiometric output	$\geq 10\text{ k}\Omega$		
<ul style="list-style-type: none"> • Load • Auxiliary power U_B • Power consumption 	< 7 mA at 10 k Ω		
Characteristic curve	0 ... 90 %		
	$\geq 10\text{ k}\Omega$		
	5 V DC $\pm 10\%$		
	< 7 mA at 10 k Ω		
	Linear rising		
Measuring accuracy		Certificates and approvals	
Error in measurement at limit setting incl. hysteresis and reproducibility	<ul style="list-style-type: none"> • Typical: 0.25 % of measuring span • Maximum: 0.5 % of measuring span 	Classification according to pressure equipment directive (PED 2014/68/EU)	For gases of fluid group 1 and liquids of fluid group 1; complies with requirements of article 4, paragraph 3 (sound engineering practice)
Step response time T_{99}	< 5 ms	Lloyd's Register of Shipping (LR) ¹⁾	12/20010
Long-term stability		Germanischer Lloyd (GL) ¹⁾	GL19740 11 HH00
<ul style="list-style-type: none"> • Lower range value and measuring span 	0.25 % of measuring span/year	American Bureau of Shipping (ABS) ¹⁾	ABS_11_HG 789392_PDA
Influence of ambient temperature		Bureau Veritas (BV) ¹⁾	BV 271007A0 BV
<ul style="list-style-type: none"> • Lower range value and measuring span • Influence of power supply 	0.25 %/10 K of measuring span	Det Norske Veritas (DNV) ¹⁾	A 12553
	0.005 %/V	Drinking water approval (ACS) ¹⁾	ACS 15 ACC NY 360
Conditions of use		EAC ¹⁾	No TC RU C-DE.ГБ05.В.00732 OC НАИО «ЦСВЭ»
Process temperature with gasket made of:		Underwriters Laboratories (UL) ¹⁾	
<ul style="list-style-type: none"> • FPM (Standard) • Neoprene • Perbunan • EPDM 	<ul style="list-style-type: none"> -15 ... +125 °C (+5 ... +257 °F) -35 ... +100 °C (-31 ... +212 °F) -20 ... +100 °C (-4 ... +212 °F) -40 ... +125 °C (-40 ... +257 °F), usable for drinking water 	<ul style="list-style-type: none"> • for USA and Canada • worldwide 	UL 20110217 - E34453
Ambient temperature	-25 ... +85 °C (-13 ... +185 °F)		IEC UL DK 21845
Storage temperature	-50 ... +100 °C (-58 ... +212 °F)		
Degree of protection (to EN 60529)	<ul style="list-style-type: none"> • IP 65 with connector per EN 175301-803-A • IP 67 with device plug M12 • IP 67 with cable • IP 67 with cable quick screw connection 		

¹⁾ For variants with output signal 0 ... 5 V and ratiometric output available soon.

Pressure Measurement

Pressure transmitters

Single-range transmitters for general applications

1

SITRANS P200 for gauge and absolute pressure

Selection and ordering data

SITRANS P 200 pressure transmitters for pressure and absolute pressure for general applications

Characteristic curve deviation typ. 0.25 %

Wetted parts materials: Ceramic and stainless steel + sealing material

Non-wetted parts materials: stainless steel

↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Measuring range	Overload limit	Burst pressure	Article No.	Order code
For gauge pressure				
0 ... 1 bar (0 ... 14.5 psi)	-1 bar (-14.5 psi)	2.5 bar (36.26 psi)	> 2.5 bar (> 36.3 psi)	3 BA
0 ... 1.6 bar (0 ... 23.2 psi)	-1 bar (-14.5 psi)	4 bar (58.02 psi)	> 4 bar (> 58.0 psi)	3 BB
0 ... 2.5 bar (0 ... 36.3 psi)	-1 bar (-14.5 psi)	6.25 bar (90.65 psi)	> 6.25 bar (> 90.7 psi)	3 BD
0 ... 4 bar (0 ... 58.0 psi)	-1 bar (-14.5 psi)	10 bar (145 psi)	> 10 bar (> 145 psi)	3 BE
0 ... 6 bar (0 ... 87.0 psi)	-1 bar (-14.5 psi)	15 bar (217 psi)	> 15 bar (> 217 psi)	3 BG
0 ... 10 bar (0 ... 145 psi)	-1 bar (-14.5 psi)	25 bar (362 psi)	> 25 bar (> 362 psi)	3 CA
0 ... 16 bar (0 ... 232 psi)	-1 bar (-14.5 psi)	40 bar (580 psi)	> 40 bar (> 580 psi)	3 CB
0 ... 25 bar (0 ... 363 psi)	-1 bar (-14.5 psi)	62.5 bar (906 psi)	> 62.5 bar (> 906 psi)	3 CD
0 ... 40 bar (0 ... 580 psi)	-1 bar (-14.5 psi)	100 bar (1450 psi)	> 100 bar (> 1450 psi)	3 CE
0 ... 60 bar (0 ... 870 psi)	-1 bar (-14.5 psi)	150 bar (2175 psi)	> 150 bar (> 2175 psi)	3 CG
Other version, add Order code and plain text: Measuring range: ... up to... bar (psi)			9 AA	H 1 Y
For absolute pressure				
0 ... 0.6 bar a (0 ... 8.7 psi a)	0 bar a (0 psi a)	2.5 bar a (36.26 psi a)	> 2.5 bar a (> 36.3 psi a)	5 AG
0 ... 1 bar a (0 ... 14.5 psi a)	0 bar a (0 psi a)	2.5 bar a (36.26 psi a)	> 2.5 bar a (> 36.3 psi a)	5 BA
0 ... 1.6 bar a (0 ... 23.2 psi a)	0 bar a (0 psi a)	4 bar a (58.02 psi a)	> 4 bar a (> 58.0 psi a)	5 BB
0 ... 2.5 bar a (0 ... 36.3 psi a)	0 bar a (0 psi a)	6.25 bar a (90.65 psi a)	> 6.25 bar a (> 90.7 psi a)	5 BD
0 ... 4 bar a (0 ... 58.0 psi a)	0 bar a (0 psi a)	10 bar a (145 psi a)	> 10 bar a (> 145 psi a)	5 BE
0 ... 6 bar a (0 ... 87.0 psi a)	0 bar a (0 psi a)	15 bar a (217 psi a)	> 15 bar a (> 217 psi a)	5 BG
0 ... 10 bar a (0 ... 145 psi)	0 bar a (0 psi a)	25 bar a (362 psi a)	> 25 bar a (> 362 psi a)	5 CA
0 ... 16 bar a (0 ... 232 psi)	0 bar a (0 psi a)	40 bar a (580 psi a)	> 40 bar a (> 580 psi a)	5 CB
Other version, add Order code and plain text: Measuring range: ... up to ... mbar a (psi a)			9 AA	H 2 Y
Measuring ranges for gauge pressure				
0 ... 15 psi	-14.5 psi	35 psi	> 35 psi	4 BB
3 ... 15 psi	-14.5 psi	35 psi	> 35 psi	4 BC
0 ... 20 psi	-14.5 psi	50 psi	> 50 psi	4 BD
0 ... 30 psi	-14.5 psi	80 psi	> 80 psi	4 BE
0 ... 60 psi	-14.5 psi	140 psi	> 140 psi	4 BF
0 ... 100 psi	-14.5 psi	200 psi	> 200 psi	4 BG
0 ... 150 psi	-14.5 psi	350 psi	> 350 psi	4 CA
0 ... 200 psi	-14.5 psi	550 psi	> 550 psi	4 CB
0 ... 300 psi	-14.5 psi	800 psi	> 800 psi	4 CD
0 ... 500 psi	-14.5 psi	1400 psi	> 1400 psi	4 CE
0 ... 750 psi	-14.5 psi	2000 psi	> 2000 psi	4 CF
0 ... 1000 psi	-14.5 psi	2000 psi	> 2000 psi	4 CG
Other version, add Order code and plain text: Measuring range: ... up to ... psi			9 AA	H 1 Y
Measuring ranges for absolute pressure				
0 ... 10 psi a	0 psi a	35 psi a	> 35 psi a	6 AG
0 ... 15 psi a	0 psi a	35 psi a	> 35 psi a	6 BA
0 ... 20 psi a	0 psi a	50 psi a	> 50 psi a	6 BB
0 ... 30 psi a	0 psi a	80 psi a	> 80 psi a	6 BD
0 ... 60 psi a	0 psi a	140 psi a	> 140 psi a	6 BE
0 ... 100 psi a	0 psi a	200 psi a	> 200 psi a	6 BG
0 ... 150 psi a	0 psi a	350 psi a	> 350 psi a	6 CA
0 ... 200 psi a	0 psi a	550 psi a	> 550 psi a	6 CB
0 ... 300 psi a	0 psi a	800 psi a	> 800 psi a	6 CC
Other version, add Order code and plain text: Measuring range: ... up to ... psi a			9 AA	H 2 Y

Pressure Measurement

Pressure transmitters

Single-range transmitters for general applications

1

SITRANS P200 for gauge and absolute pressure

Selection and ordering data	Article No.	Order code
SITRANS P 200 pressure transmitters for pressure and absolute pressure for general applications Accuracy typ. 0.25 % Wetted parts materials: Ceramic and stainless steel + sealing material Non-wetted parts materials: stainless steel	7MF 1 5 6 5 -	
Output signal 4 ... 20 mA; two-wire system; power supply 7 ... 33 V DC (10 ... 30 V DC for ATEX versions) 0 ... 10 V; three-wire system; power supply 12 ... 33 V DC 0 ... 5 V; 3-wire system; auxiliary power 7 ... 33 V DC Ratiometric 10 ... 90 %; 3-wire system; auxiliary power 5 V DC ± 10 %	0 1 0 2 0 3 0	
Explosion protection (only 4 ... 20 mA) None With explosion protection Ex ia IIC T4	0 1	
Electrical connection Connector per DIN EN 175301-803-A, stuffing box thread M16 (with coupling) Device plug M12 per IEC 61076-2-101 Connection via fixed mounted cable, 2 m (not for type of protection "Intrinsic safety i") Quiccon cable quick screw connection PG9 (not for type of protection "Intrinsic safety i") Connector per DIN EN 175301-803-A, stuffing box thread 1/2"-14 NPT (with coupling) Connector per DIN EN 175301-803-A, stuffing box thread PG11 (with coupling) Fixed mounted cable, length 5 m Special version	1 2 0 3 0 4 5 6 0 7 9	N 1 Y
Process connection G½" male per EN 837-1 (½" BSP male) (standard for metric pressure ranges mbar, bar) G½" male thread and G1/8" female thread G¼" male per EN 837-1 (¼" BSP male) 7/16"-20 UNF male ¼"-18 NPT male (standard for pressure ranges inH ₂ O and psi) ¼"-18 NPT female ½"-14 NPT male ½"-14 NPT female 7/16"-20 UNF female M20x1.5 male G1/4" to DIN 3852 Form E G1/2" to DIN 3852 Form E Special version	A B C D E F G H J P Q R Z P 1 Y	
Sealing material between sensor and enclosure Viton (FPM, standard) Neoprene (CR) Perbunan (NBR) EPDM Special version	A B C D Z	Q 1 Y
Version Standard version	1	
Further designs Supplement the Article No. with "-Z" and add Order code. Quality Inspection Certificate (5-point characteristic curve test) according to IEC 60770-2 Oxygen version, free of oil and degreased, max. operating pressure 60 bar, max. process temperature +85 °C (only in conjunction with the sealing material Viton between sensor and enclosure and not with explosion protection version)	C11 E10	

Pressure Measurement


Pressure transmitters

Single-range transmitters for general applications


1

SITRANS P200 for gauge and absolute pressure









Dimensional drawings

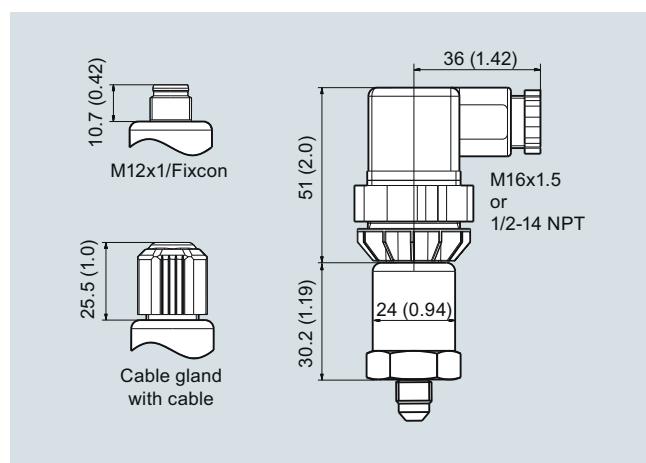



SITRANS P200, electrical connections, dimensions in mm (inch)

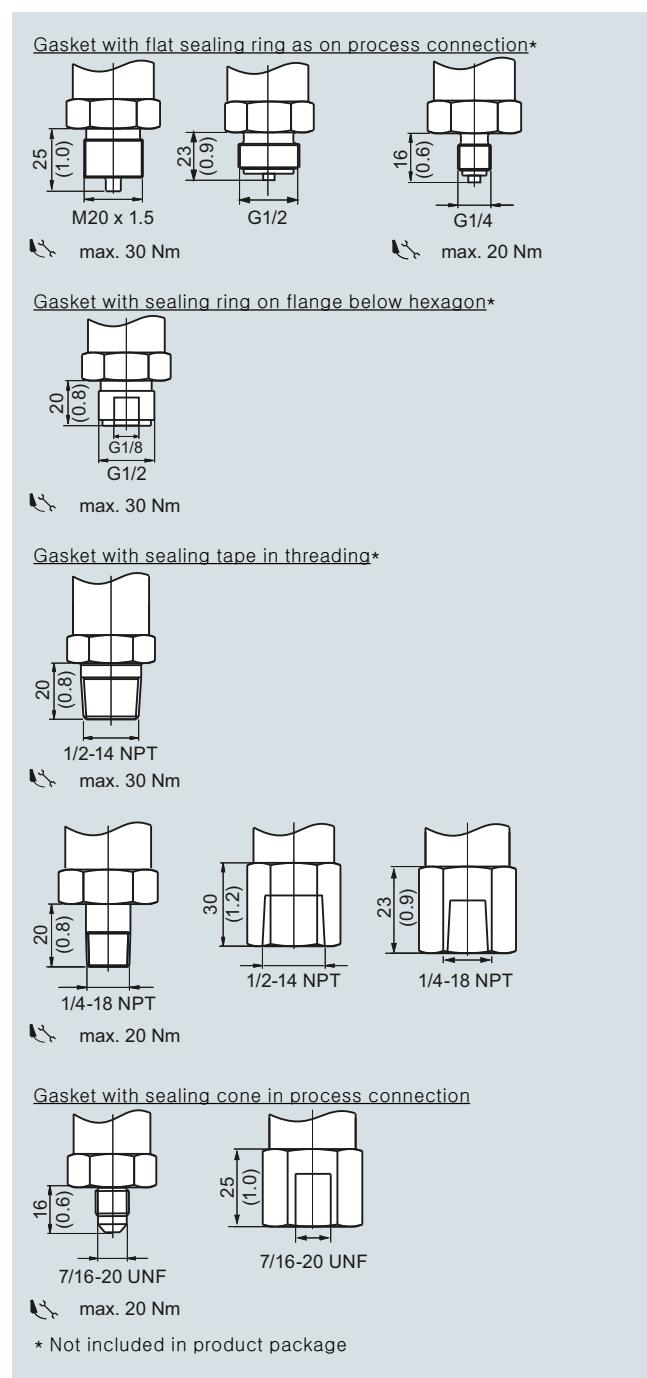

SITRANS P200, process connections, dimensions in mm (inch)

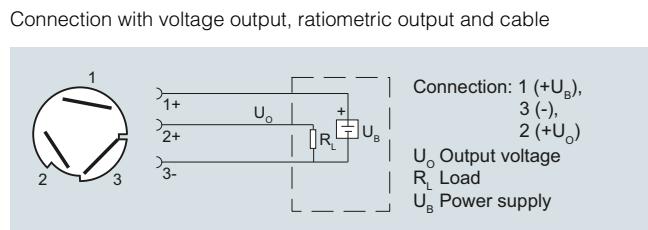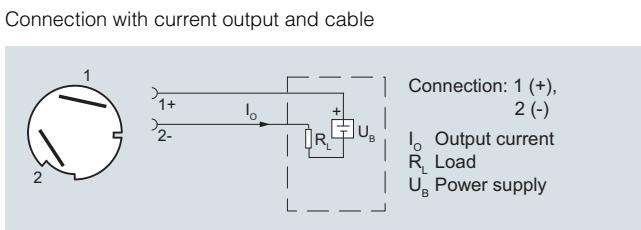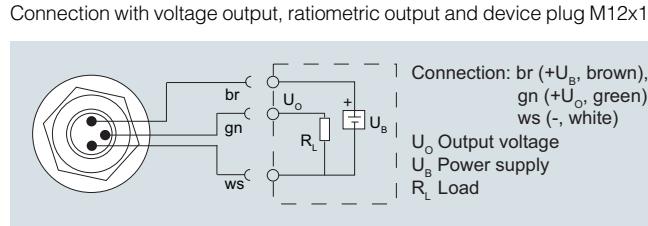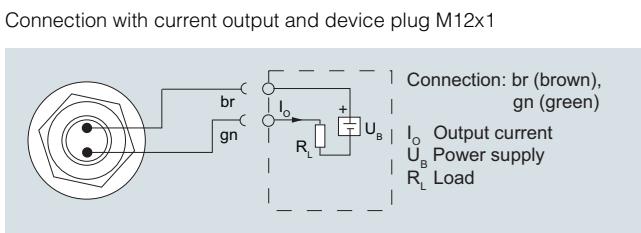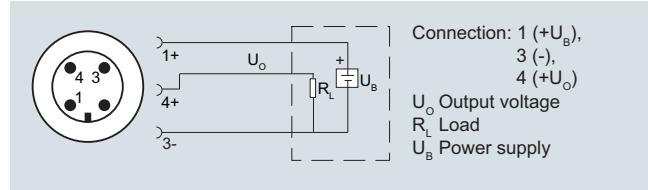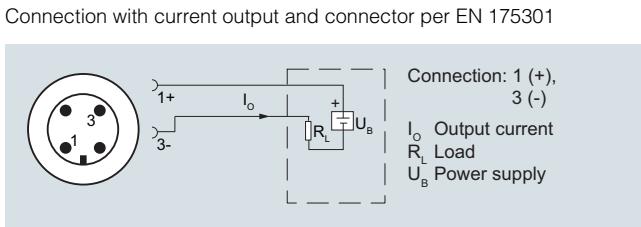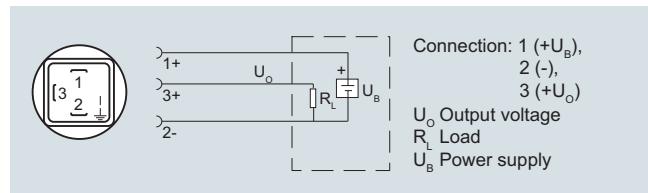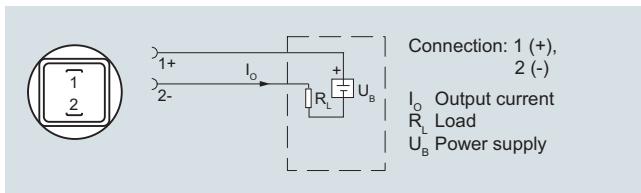Schematics**Version with explosion protection: 4 ... 20 mA**

The grounding connection is conductively bonded to the transmitter enclosure

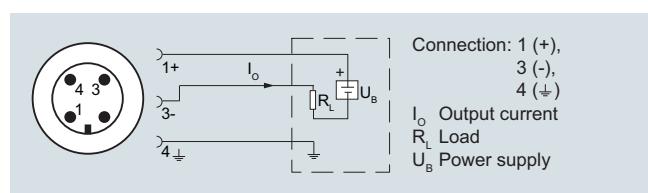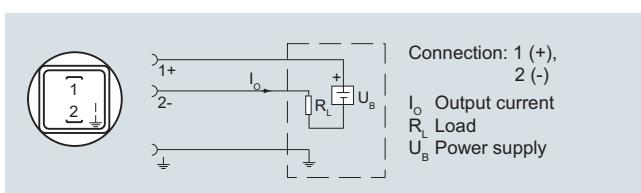

Pressure Measurement

Pressure transmitters

Single-range transmitters for general applications

1

SITRANS P210 for gauge pressure

Overview



The pressure transmitter SITRANS P210 measures the gauge pressure of liquids, gases and vapors.

- Stainless steel measuring cell
- Measuring ranges 100 to 600 mbar (1.45 to 8.7 psi) relative
- For low-pressure applications

Benefits

- High measuring accuracy
- Rugged stainless steel enclosure
- High overload withstand capability
- For aggressive and non-aggressive media
- For measuring the pressure of liquids, gases and vapors
- Compact design

Application

The pressure transmitter SITRANS P210 for gauge pressure is used in the following industrial areas:

- Mechanical engineering
- Shipbuilding
- Power engineering
- Chemical industry
- Water supply

Design

Device structure without explosion protection

The pressure transmitter consists of a piezoresistive measuring cell with a diaphragm installed in a stainless steel enclosure. It can be used with a connector per EN 175301-803-A (IP65), a device plug M12 (IP67), a cable (IP67) or a Quickon cable quick screw connection (IP67) connected electrically. The output signal is between 4 and 20 mA or 0 and 10 V.


Device structure with explosion protection

The pressure transmitter consists of a piezoresistive measuring cell with a diaphragm installed in a stainless steel enclosure. It can be used with a connector per EN 175301-803-A (IP65) or a device plug M12 (IP67) connected electrically. The output signal is between 4 and 20 mA.

Function

The pressure transmitter measures the gauge pressure of liquids and gases as well as the level of liquids.

Mode of operation

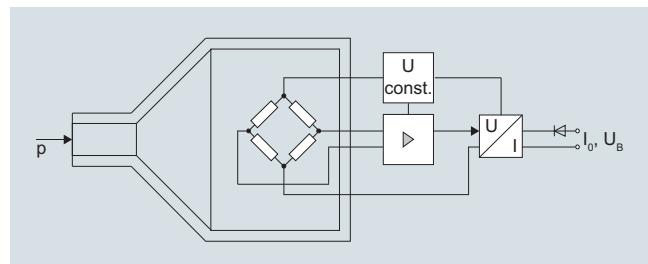

SITRANS P210 pressure transmitters (7MF1566...), functional diagram

The stainless steel measuring cell has a thin-film resistance bridge to which the operating pressure p is transmitted through a stainless steel diaphragm.

The voltage output from the measuring cell is converted by an amplifier into an output current of 4 to 20 mA or an output voltage of 0 to 10 V DC.

The output current and voltage are linearly proportional to the input pressure.

Technical specifications

Application	Liquids, gases and vapors	Design	Approx. 0.090 kg (0.198 lb) See dimension drawings
Gauge measurement		Weight	
Mode of operation		Process connections	
Measuring principle	Piezoresistive measuring cell (stainless steel diaphragm)	Electrical connections	<ul style="list-style-type: none"> • Connector per EN 175301-803-A Form A with cable inlet M16x1.5 or 1/2-14 NPT or Pg 11 • Device plug M12 • 2 or 3-wire (0.5 mm²) cable ($\varnothing \pm 5.4$ mm) • QuicKon cable quick screw connection
Measured variable	Gauge pressure		
Inputs			
Measuring range		Wetted parts materials	
• Gauge pressure	100 ... 600 mbar (1.5 ... 8.7 psi)	<ul style="list-style-type: none"> • Measuring cell • Process connection • Gasket 	<ul style="list-style-type: none"> Stainless steel, mat.-No. 1.4435 Stainless steel, mat. No. 1.4404 (SST 316 L) • FPM (Standard) • Neoprene • Perbunan • EPDM
Output		Non-wetted parts materials	
Current signal	4 ... 20 mA	<ul style="list-style-type: none"> • Enclosure • Rack • cables 	<ul style="list-style-type: none"> Stainless steel, mat. No. 1.4404 (SST 316 L) Plastic PVC
• Load	(U _B - 10 V)/0.02 A		
• Auxiliary power U _B	DC 7 ... 33 V (10 ... 30 V for Ex)		
Voltage signal	0 ... 10 V DC		
• Load	$\geq 10 \text{ k}\Omega$		
• Auxiliary power U _B	12 ... 33 V DC		
• Power consumption	< 7 mA at 10 kΩ		
Ratiometric output	0 ... 90 %		
• Load	$\geq 10 \text{ k}\Omega$		
• Auxiliary power U _B	5 V DC $\pm 10\%$		
• Power consumption	< 7 mA at 10 kΩ		
Characteristic curve	Linear rising		
Measuring accuracy		Certificates and approvals	
Error in measurement at limit setting incl. hysteresis and reproducibility	<ul style="list-style-type: none"> • Typical: 0.25 % of measuring span • Maximum: 0.5 % of measuring span 	Classification according to pressure equipment directive (PED 2014/68/EU)	For gases of fluid group 1 and liquids of fluid group 1; meets requirements as per article 4, paragraph 3 (good engineering practice)
Step response time T ₉₉	< 5 ms	Lloyd's Register of Shipping (LR) ¹⁾	12/20010
Long-term stability		Germanischer Lloyd (GL) ¹⁾	GL19740 11 HH00
• Lower range value and measuring span	0.25 % of measuring span/year	American Bureau of Shipping (ABS) ¹⁾	ABS_11_HG 789392_PDA
Influence of ambient temperature		Bureau Veritas (BV) ¹⁾	BV 271007A0 BV
• Lower range value and measuring span	<ul style="list-style-type: none"> • 0.25 %/10 K of measuring span • 0.5 %/10K of measuring span for a measuring range 100 ... 400 mbar 	Det Norske Veritas (DNV) ¹⁾	A 12553
• Influence of power supply	0.005 %/V	Drinking water approval (ACS) ¹⁾	ACS 15 ACC NY 360
Conditions of use		EAC ¹⁾	No TC RU C-DE.Г505.B.00732 OC НАИО «ЦСВЭ»
Process temperature with gasket made of:		Underwriters Laboratories (UL) ¹⁾	
• FPM (Standard)	-15 ... +125 °C (+5 ... +257 °F)	<ul style="list-style-type: none"> • for USA and Canada • worldwide 	UL 20110217 - E34453
• Neoprene	-35 ... +100 °C (-31 ... +212 °F)		IEC UL DK 21845
• Perbunan	-20 ... +100 °C (-4 ... +212 °F)		
• EPDM	-40 ... +125 °C (-40 ... +257 °F), usable for drinking water		
Ambient temperature	-25 ... +85 °C (-13 ... +185 °F)	Explosion protection	
Storage temperature	-50 ... +100 °C (-58 ... +212 °F)	Intrinsic safety "i" (only with current output)	Ex II 1/2 G Ex ia IIC T4 Ga/Gb Ex II 1/2 D Ex ia IIIC T125 °C Da/Db
Degree of protection (to EN 60529)	<ul style="list-style-type: none"> • IP 65 with connector per EN 175301-803-A • IP 67 with device plug M12 • IP 67 with cable • IP 67 with cable quick screw connection 	EC type-examination certificate	SEV 10 ATEX 0146
Electromagnetic compatibility	<ul style="list-style-type: none"> • acc. IEC 61326-1/-2/-3 • acc. NAMUR NE21, only for ATEX versions and with a max. measuring deviation $\leq 1\%$ 	Connection to certified intrinsically-safe resistive circuits with maximum values:	U _i ≤ 30 V DC; I _i ≤ 100 mA; P _i ≤ 0.75 W
Mounting position	upright	Effective internal inductance and capacity for versions with plugs per EN 175301-803-A and M12	L _i = 0 nH; C _i = 0 nF

¹⁾ For variants with output signal 0 ... 5 V and ratiometric output available soon.

Pressure Measurement

Pressure transmitters

Single-range transmitters for general applications

1

SITRANS P210 for gauge pressure

Selection and ordering data

SITRANS P 210 pressure transmitters for gauge pressure for low pressure applications


Accuracy typ. 0.25 %

Wetted parts materials: Stainless steel + sealing material




Non-wetted parts materials: stainless steel

↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Measuring range	Overload limit min.	Overload limit max.	Burst pressure	Article No.	Order code
For gauge pressure					
0...100 mbar (1.45 psi)	-400 mbar (-5.8 psi)	400 mbar (5.8 psi)	1 bar (14.5 psi)	7MF1566 -	3AA
0...160 mbar (2.32 psi)	-400 mbar (-5.8 psi)	400 mbar (5.8 psi)	1 bar (14.5 psi)		3AB
0...250 mbar (3.63 psi)	-800 mbar (-11.6 psi)	1000 mbar (14.5 psi)	2 bar (29.0 psi)		3AC
0...400 mbar (5.8 psi)	-800 mbar (-11.6 psi)	1000 mbar (14.5 psi)	2 bar (29.0 psi)		3AD
0...600 mbar (8.7 psi)	-1000 mbar (-14.5 psi)	2000 mbar (29.0 psi)	3 bar (43.5 psi)		3AG
Other version, add Order code and plain text: Measuring range: ... up to ... mbar (psi)					
Output signal					
4 ... 20 mA; two-wire system; power supply 7 ... 33 V DC (10 ... 30 V DC for ATEX versions)				9AA	H1Y
0 ... 10 V; three-wire system; power supply 12 ... 33 V DC				0	
0 ... 5 V; 3-wire system; auxiliary power 7 ... 33 V DC				1	
Ratiometric 10 ... 90 %; 3-wire system; auxiliary power 5 V DC ± 10 %				2	
Explosion protection (only 4 ... 20 mA)					
None				3	
With explosion protection Ex ia IIC T4				0	
Electrical connection					
Connector per DIN EN 175301-803-A, stuffing box thread M16 (with coupling)				1	
Device plug M12 per IEC 61076-2-101				2	
Connection via fixed mounted cable, 2 m (not for type of protection "Intrinsic safety i")				0	
QuicKON cable quick screw connection PG9 (not for type of protection "Intrinsic safety i")				3	
Connector per DIN EN 175301-803-A, stuffing box thread 1/2"-14 NPT (with coupling)				0	
Connector per DIN EN 175301-803-A, stuffing box thread PG11 (with coupling)				4	
Fixed mounted cable, length 5 m				5	
Special version				6	
Process connection					
G1/2" male per EN 837-1 (1/2" BSP male) (standard for metric pressure ranges mbar, bar)				0	
G1/2" male thread and G1/8" female thread				1	
G1/4" male per EN 837-1 (1/4" BSP male)				2	
7/16"-20 UNF male				3	
1/4"-18 NPT male (standard for pressure ranges inH ₂ O and psi)				0	
1/4"-18 NPT female				1	
1/2"-14 NPT male				2	
1/2"-14 NPT female				3	
7/16"-20 UNF female				4	
M20x1.5 male				5	
G1/4" to DIN 3852 Form E				6	
G1/2" to DIN 3852 Form E				7	
Special version				8	
Sealing material between sensor and enclosure					
Viton (FPM, standard)				A	
Neoprene (CR)				B	
Perbunan (NBR)				C	
EPDM				D	
Special version				Z	
Version					
Standard version				1	
Further designs					
Supplement the Article No. with "-Z" and add Order code.					
Quality Inspection Certificate (5-point characteristic curve test) according to IEC 60770-2				C11	

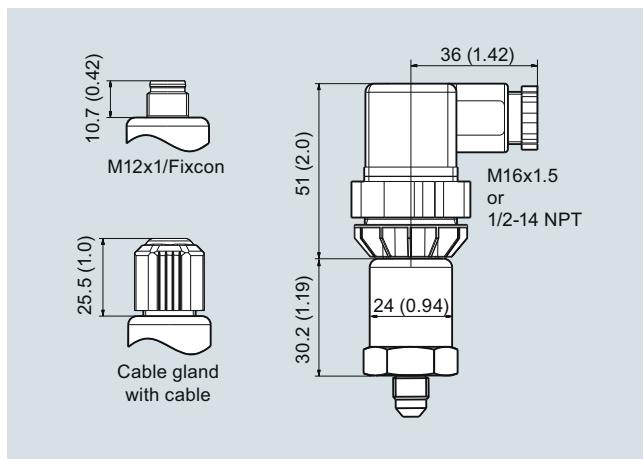Dimensional drawings

SITRANS P210, electrical connections, dimensions in mm (inch)

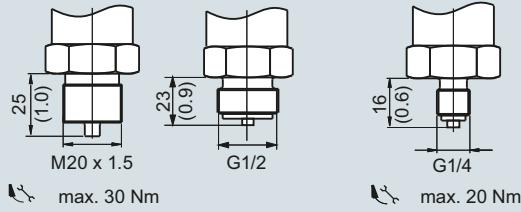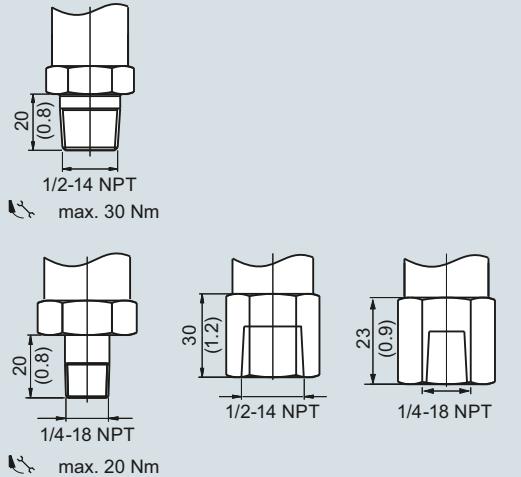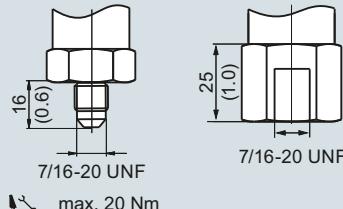Gasket with flat sealing ring as on process connection*Gasket with sealing ring on flange below hexagon*Gasket with sealing tape in threading*Gasket with sealing cone in process connection

* Not included in product package

SITRANS P210, process connections, dimensions in mm (inch)

Pressure Measurement



Pressure transmitters

Single-range transmitters for general applications



1

SITRANS P210 for gauge pressure



Schematics

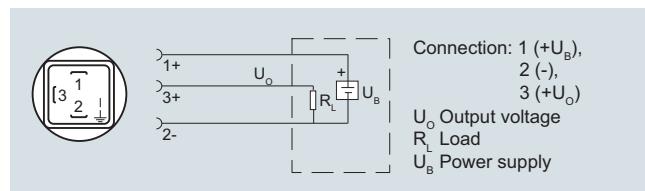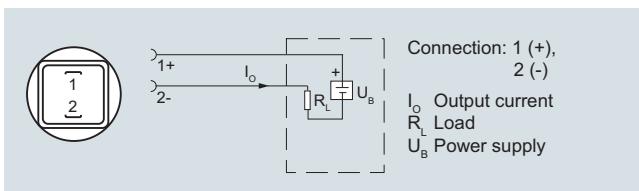


Connection with current output and device plug M12x1

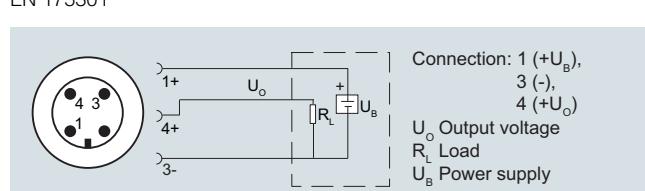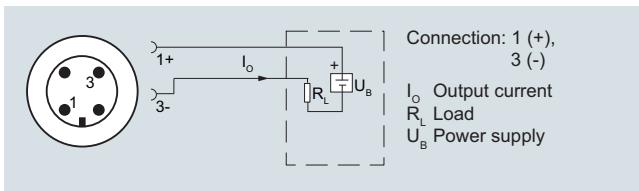

Connection with current output and cable

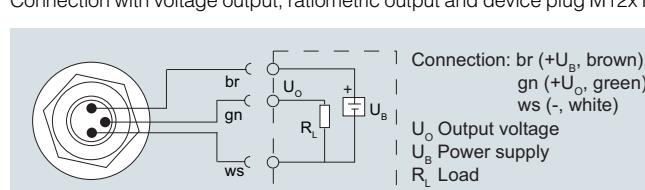
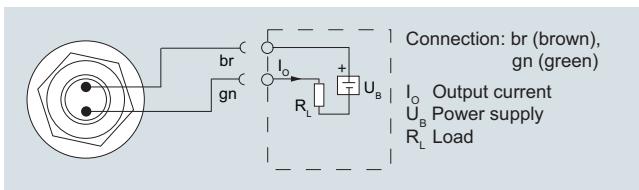


Connection with current output and Quikon cable quick screw connection

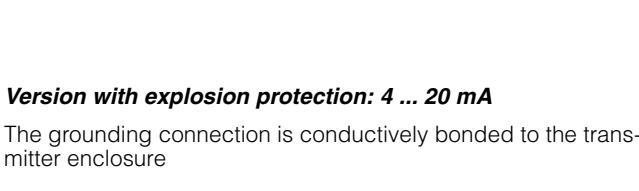

Version with explosion protection: 4 ... 20 mA

The grounding connection is conductively bonded to the transmitter enclosure

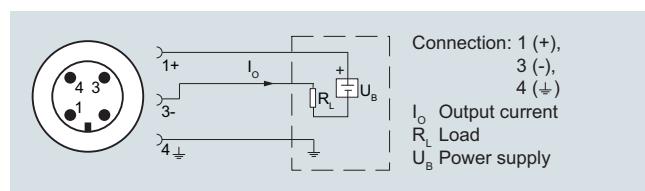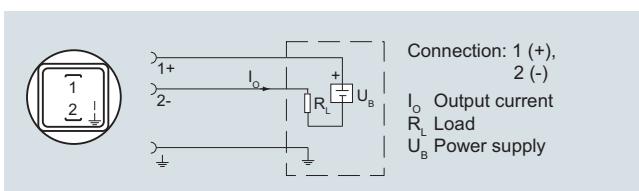

Overview

The pressure transmitter SITRANS P220 measures the gauge pressure of liquids, gases and vapors.

- Stainless steel measuring cell, fully welded
- Measuring ranges 2.5 to 1000 bar (36.3 to 14500 psi) relative
- For high-pressure applications and refrigeration technology division

Benefits

- High measuring accuracy
- Rugged stainless steel enclosure
- High overload withstand capability
- For aggressive and non-aggressive media
- For measuring the pressure of liquids, gases and vapors
- Compact design
- Gasket-less

Application

The pressure transmitter SITRANS P220 for gauge pressure is used in the following industrial areas:

- Mechanical engineering
- Shipbuilding
- Power engineering
- Chemical industry
- Water supply

Design**Device structure without explosion protection**


The pressure transmitter consists of a piezoresistive measuring cell with a diaphragm installed in a stainless steel enclosure. It can be used with a connector per EN 175301-803-A (IP65), a device plug M12 (IP67), a cable (IP67) or a Quickon cable quick screw connection (IP67) connected electrically. The output signal is between 4 and 20 mA or 0 and 10 V.

Device structure with explosion protection

The pressure transmitter consists of a piezoresistive measuring cell with a diaphragm installed in a stainless steel enclosure. It can be used with a connector per EN 175301-803-A (IP65) or a device plug M12 (IP67) connected electrically. The output signal is between 4 and 20 mA.

Function

The pressure transmitter measures the gauge pressure of liquids and gases as well as the level of liquids.

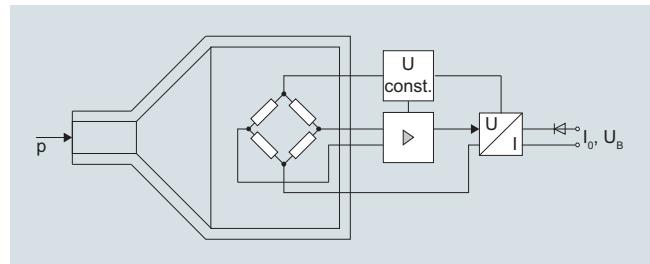Mode of operation

SITRANS P220 pressure transmitters (7MF1567...), functional diagram

The stainless steel measuring cell has a thick-film resistance bridge to which the operating pressure p is transmitted through a stainless steel diaphragm.

The voltage output from the measuring cell is converted by an amplifier into an output current of 4 to 20 mA or an output voltage of 0 to 10 V DC.

The output current and voltage are linearly proportional to the input pressure.

Pressure Measurement

Pressure transmitters

Single-range transmitters for general applications

1

SITRANS P220 for gauge pressure

Technical specifications

Application		Design
Gauge pressure measurement		Approx. 0.090 kg (0.198 lb) See dimension drawings
Mode of operation		<ul style="list-style-type: none"> Connector per EN 175301-803-A Form A with cable inlet M16x1.5 or 1/2-14 NPT or Pg 11 Device plug M12 2 or 3-wire (0.5 mm²) cable ($\varnothing \pm 5.4$ mm) QuicKON cable quick screw connection
Measuring principle		
Measured variable		
Inputs		
Measuring range		
<ul style="list-style-type: none"> Gauge pressure <ul style="list-style-type: none"> Metric US measuring range 		<p>2.5 ... 1000 bar (36 ... 14500 psi)</p> <p>30 ... 14500 psi</p>
Output		
Current signal		4 ... 20 mA
<ul style="list-style-type: none"> Load Auxiliary power U_B 		(U _B - 10 V)/0.02 A
Voltage signal		DC 7 ... 33 V (10 ... 30 V for Ex)
<ul style="list-style-type: none"> Load Auxiliary power U_B Power consumption 		<p>0 ... 10 V DC</p> <p>$\geq 10 \text{ k}\Omega$</p> <p>12 ... 33 V DC</p> <p>< 7 mA at 10 kΩ</p>
Ratiometric output		0 ... 90 %
<ul style="list-style-type: none"> Load Auxiliary power U_B Power consumption 		<p>$\geq 10 \text{ k}\Omega$</p> <p>5 V DC ± 10 %</p> <p>< 7 mA at 10 kΩ</p>
Characteristic curve		Linear rising
Measuring accuracy		
Error in measurement at limit setting incl. hysteresis and reproducibility		<ul style="list-style-type: none"> Typical: 0.25 % of measuring span Maximum: 0.5 % of measuring span
Step response time T ₉₉		< 5 ms
Long-term stability		
<ul style="list-style-type: none"> Lower range value and measuring span 		0.25 % of measuring span/year
Influence of ambient temperature		
<ul style="list-style-type: none"> Lower range value and measuring span Influence of power supply 		0.25 %/10 K of measuring span
		0.005 %/V
Conditions of use		
<ul style="list-style-type: none"> Process temperature Ambient temperature Storage temperature Degree of protection (to EN 60529) 		<p>-40 ... +120 °C (-40 ... +248 °F)</p> <p>-25 ... +85 °C (-13 ... +185 °F)</p> <p>-50 ... +100 °C (-58 ... +212 °F)</p> <ul style="list-style-type: none"> IP 65 with connector per EN 175301-803-A IP 67 with device plug M12 IP 67 with cable IP 67 with cable quick screw connection acc. IEC 61326-1/-2/-3 acc. NAMUR NE21, only for ATEX versions and with a max. measuring deviation ≤ 1 %
Electromagnetic compatibility		
Design		
Weight		Approx. 0.090 kg (0.198 lb)
Process connections		See dimension drawings
Electrical connections		
Wetted parts materials		
<ul style="list-style-type: none"> Measuring cell Process connection 		<p>Stainless steel, mat.-No. 1.4016</p> <p>Stainless steel, mat. No. 1.4404 (SST 316 L)</p>
Non-wetted parts materials		
<ul style="list-style-type: none"> Enclosure Rack cables 		<p>Stainless steel, mat. No. 1.4404 (SST 316 L)</p> <p>Plastic</p> <p>PVC</p>
Certificates and approvals		
Classification according to pressure equipment directive (PED 2014/68/EU)		For gases of fluid group 1 and liquids of fluid group 1; complies with requirements of article 4, paragraph 3 (sound engineering practice)
Lloyd's Register of Shipping (LR) ¹⁾		12/20010
Germanischer Lloyd (GL) ¹⁾		GL19740 11 HH00
American Bureau of Shipping (ABS) ¹⁾		ABS_11_HG 789392_PDA
Bureau Veritas (BV) ¹⁾		BV 271007A0 BV
Det Norske Veritas (DNV) ¹⁾		A 12553
Drinking water approval (ACS) ¹⁾		ACS 15 ACC NY 360
EAC ¹⁾		No TC RU C-DE.ГБ05.В.00732 OC НАИО «ЦСВЭ»
CRN ²⁾		0F18659.5C
Underwriters Laboratories (UL) ¹⁾		UL 20110217 - E34453
<ul style="list-style-type: none"> for USA and Canada worldwide 		IEC UL DK 21845
Explosion protection		
Intrinsic safety "i" (only with current output)		Ex II 1/2 G Ex ia IIC T4 Ga/Gb Ex II 1/2 D Ex ia IIIC T125 °C Da Db
EC type-examination certificate		SEV 10 ATEX 0146
Connection to certified intrinsically-safe resistive circuits with maximum values:		U _i ≤ 30 V DC; I _i ≤ 100 mA; P _i ≤ 0.75 W
Effective internal inductance and capacity for versions with plugs per EN 175301-803-A and M12		L _i = 0 nH; C _i = 0 nF
CSA ²⁾		70006348 Class I, Division I, Groups A, B, C and D; Class II, Division 1, Groups E, F and G; Class III Class I, Division 2, Groups A, B, C and D; Class II, Division 2, Groups F and G; Class III A/Ex ia IIC T4 Ga/Gb A/Ex ia IIIC T125°C Da Db

¹⁾ For variants with output signal 0 ... 5 V and ratiometric output available soon.²⁾ See ordering data for available versions.

SITRANS P220 for gauge pressure**Selection and ordering data****SITRANS P 220 pressure transmitters for gauge pressure, high-pressure and refrigeration applications, fully-welded version**

Accuracy typ. 0.25 %

Wetted parts materials: stainless steel

Non-wetted parts materials: stainless steel

↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Measuring range	Overload limit	Burst pressure	Article No.	Order code
Measuring ranges for gauge pressure	Minim-	Max.		
For gauge pressure				
0 ... 2.5 bar (0 ... 36.3 psi)	-1 bar (-14.5 psi)	6.25 bar (90.7 psi)	25 bar (363 psi)	3 BD
0 ... 4 bar (0 ... 58 psi)	-1 bar (-14.5 psi)	10 bar (145 psi)	40 bar (870 psi)	3 BE
0 ... 6 bar (0 ... 87 psi)	-1 bar (-14.5 psi)	15 bar (217 psi)	60 bar (522 psi)	3 BG
0 ... 10 bar (0 ... 145 psi)	-1 bar (-14.5 psi)	25 bar (362 psi)	60 bar (870 psi)	3 CA
0 ... 16 bar (0 ... 232 psi)	-1 bar (-14.5 psi)	40 bar (580 psi)	96 bar (1392 psi)	3 CB
0 ... 25 bar (0 ... 363 psi)	-1 bar (-14.5 psi)	62.5 bar (906 psi)	150 bar (2176 psi)	3 CD
0 ... 40 bar (0 ... 580 psi)	-1 bar (-14.5 psi)	100 bar (1450 psi)	240 bar (3481 psi)	3 CE
0 ... 60 bar (0 ... 870 psi)	-1 bar (-14.5 psi)	150 bar (2175 psi)	360 bar (5221 psi)	3 CG
0 ... 100 bar (0 ... 1450 psi)	-1 bar (-14.5 psi)	250 bar (3625 psi)	600 bar (8702 psi)	3 DA
0 ... 160 bar (0 ... 2320 psi)	-1 bar (-14.5 psi)	400 bar (5801 psi)	960 bar (13924 psi)	3 DB
0 ... 250 bar (0 ... 3625 psi)	-1 bar (-14.5 psi)	625 bar (9064 psi)	1500 bar (21756 psi)	3 DD
0 ... 400 bar (0 ... 5801 psi)	-1 bar (-14.5 psi)	1000 bar (14503 psi)	2400 bar (34809 psi)	3 DE
0 ... 600 bar (0 ... 8702 psi)	-1 bar (-14.5 psi)	1500 bar (21755 psi)	3600 bar (52200 psi)	3 DG
0 ... 1000 bar (0 ... 14500 psi)	-1 bar (-14.5 psi)	1500 bar (21755 psi)	5000 bar (72520 psi)	3 EA
Other version, add Order code and plain text: Measuring range: ... up to... bar (psi)			9 AA	H 1 Y
Output signal				
4 ... 20 mA; two-wire system; power supply 7 ... 33 V DC (10 ... 30 V DC for ATEX versions)			0	
0 ... 10 V; three-wire system; power supply 12 ... 33 V DC			1 0	
0 ... 5 V; 3-wire system; auxiliary power 7 ... 33 V DC			2 0	
Ratiometric 10 ... 90 %; 3-wire system; auxiliary power 5 V DC ± 10 %			3 0	
Explosion protection (only 4 ... 20 mA)			0	
None			1	
With explosion protection Ex ia IIC T4			0	
Electrical connection			1	
Connector per DIN EN 175301-803-A, stuffing box thread M16 (with coupling)	*		2	
Device plug M12 per IEC 61076-2-101	*		0 3	
Connection via fixed mounted cable, 2 m (not for type of protection "Intrinsic safety i")	*		0 4	
Quiccon cable quick screw connection PG9 (not for type of protection "Intrinsic safety i")	*		5	
Connector per DIN EN 175301-803-A, stuffing box thread 1/2"-14 NPT (with coupling)	*		6	
Connector per DIN EN 175301-803-A, stuffing box thread PG11 (with coupling)	*		0 7	
Fixed mounted cable, length 5 m	*		9	
Special version	*		N 1 Y	

* Order code E21 required for complete configuration with CRN and _cCSA_{us} Ex approval.

Pressure Measurement

Pressure transmitters

Single-range transmitters for general applications

1

SITRANS P220 for gauge pressure

Selection and ordering data

SITRANS P 220 pressure transmitters for gauge pressure, high-pressure and refrigeration applications, fully-welded version

Accuracy typ. 0.25 %

Wetted parts materials: stainless steel

Non-wetted parts materials: stainless steel

Process connection

G $\frac{1}{2}$ " male per EN 837-1 ($\frac{1}{2}$ " BSP male) (standard for metric pressure ranges mbar, bar)

G $\frac{1}{2}$ " male thread and G $\frac{1}{8}$ " female thread

G $\frac{1}{4}$ " male per EN 837-1 ($\frac{1}{4}$ " BSP male)

7/16"-20 UNF male

$\frac{1}{4}$ "-18 NPT male (standard for pressure ranges inH₂O and psi)

Article No.

Order code

7MF1567 -  A

A

B

C

D

E

F

G

H

J

P

Q

R

Z

P1Y

$\frac{1}{4}$ "-18 NPT female

$\frac{1}{2}$ "-14 NPT male

$\frac{1}{2}$ "-14 NPT female (Only for measuring ranges \leq 60 bar (870 psi))

7/16"-20 UNF female

M20x1.5 male

G1/4" to DIN 3852 Form E

G1/2" to DIN 3852 Form E

Special version



Version

Standard version



1

Further designs

Supplement the Article No. with "-Z" and add Order code.

C11

Quality Inspection Certificate (5-point characteristic curve test) according to IEC 60770-2
(not possible for measuring ranges > 0 ... 600 bar/0 ... 8 702 psi)


E10

Oxygen version, free of oil and degreased (not in conjunction with explosion protection version)




E21

With CRN and _cCSA_{us} Ex approval (only for measuring ranges 0 ... 30 psi bis 0 ... 8 700 psi)

* Order code E21 required for complete configuration with CRN and _cCSA_{us} Ex approval..

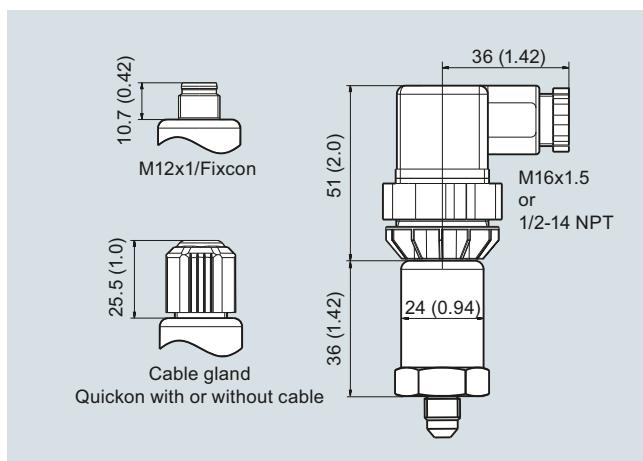Dimensional drawings

SITRANS P220, electrical connections, dimensions in mm (inch)

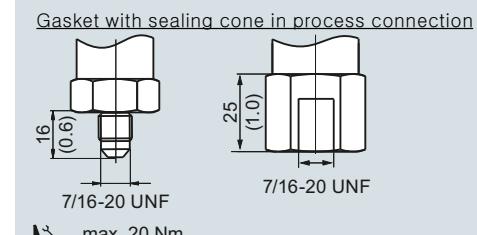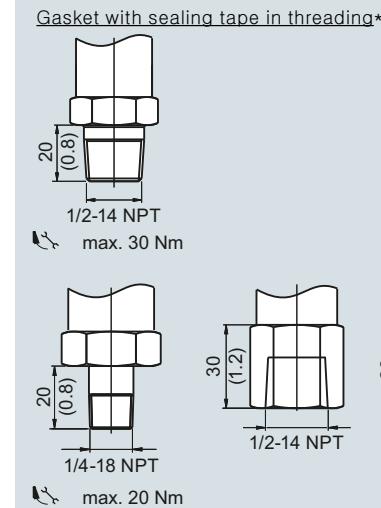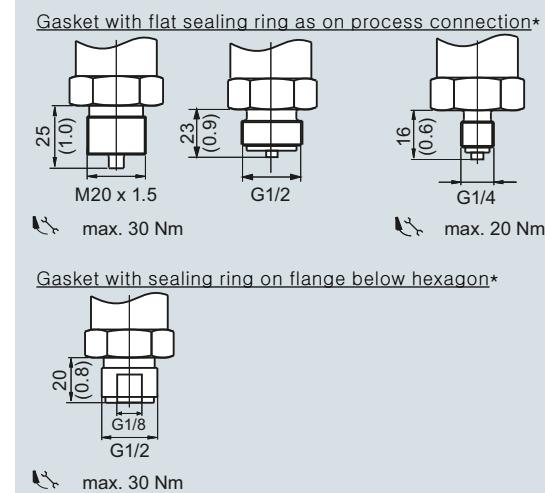

* Not included in product package

SITRANS P220, process connections, dimensions in mm (inch)

Pressure Measurement



Pressure transmitters

Single-range transmitters for general applications



1

SITRANS P220 for gauge pressure



Schematics

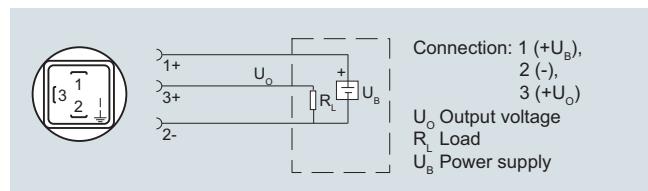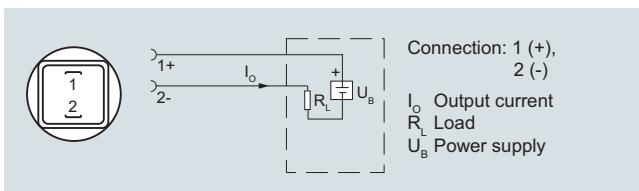

Connection with current output and device plug M12x1

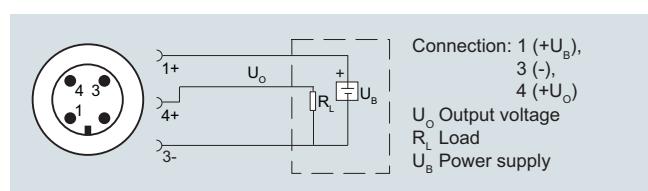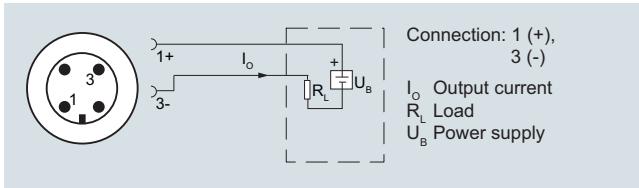

Connection with current output and cable

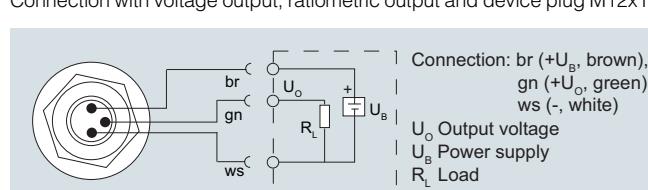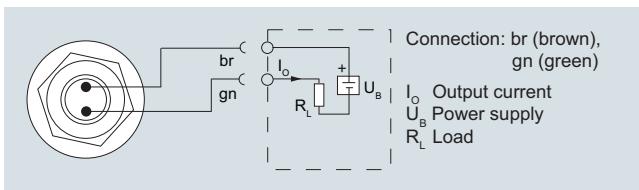

Connection with current output and cable quick screw connection Quick-on

Connection with voltage output, ratiometric output and Quickon fast cable termination

Version with explosion protection: 4 ... 20 mA

The grounding connection is conductively bonded to the transmitter enclosure

